


**JVC**<sup>®</sup>  
**PROFESSIONAL**

13-INCH COLOR VIDEO MONITOR

# TM-A130SU

High-Quality, Compact and Economical Monitor  
for a wide range of application including CCTV

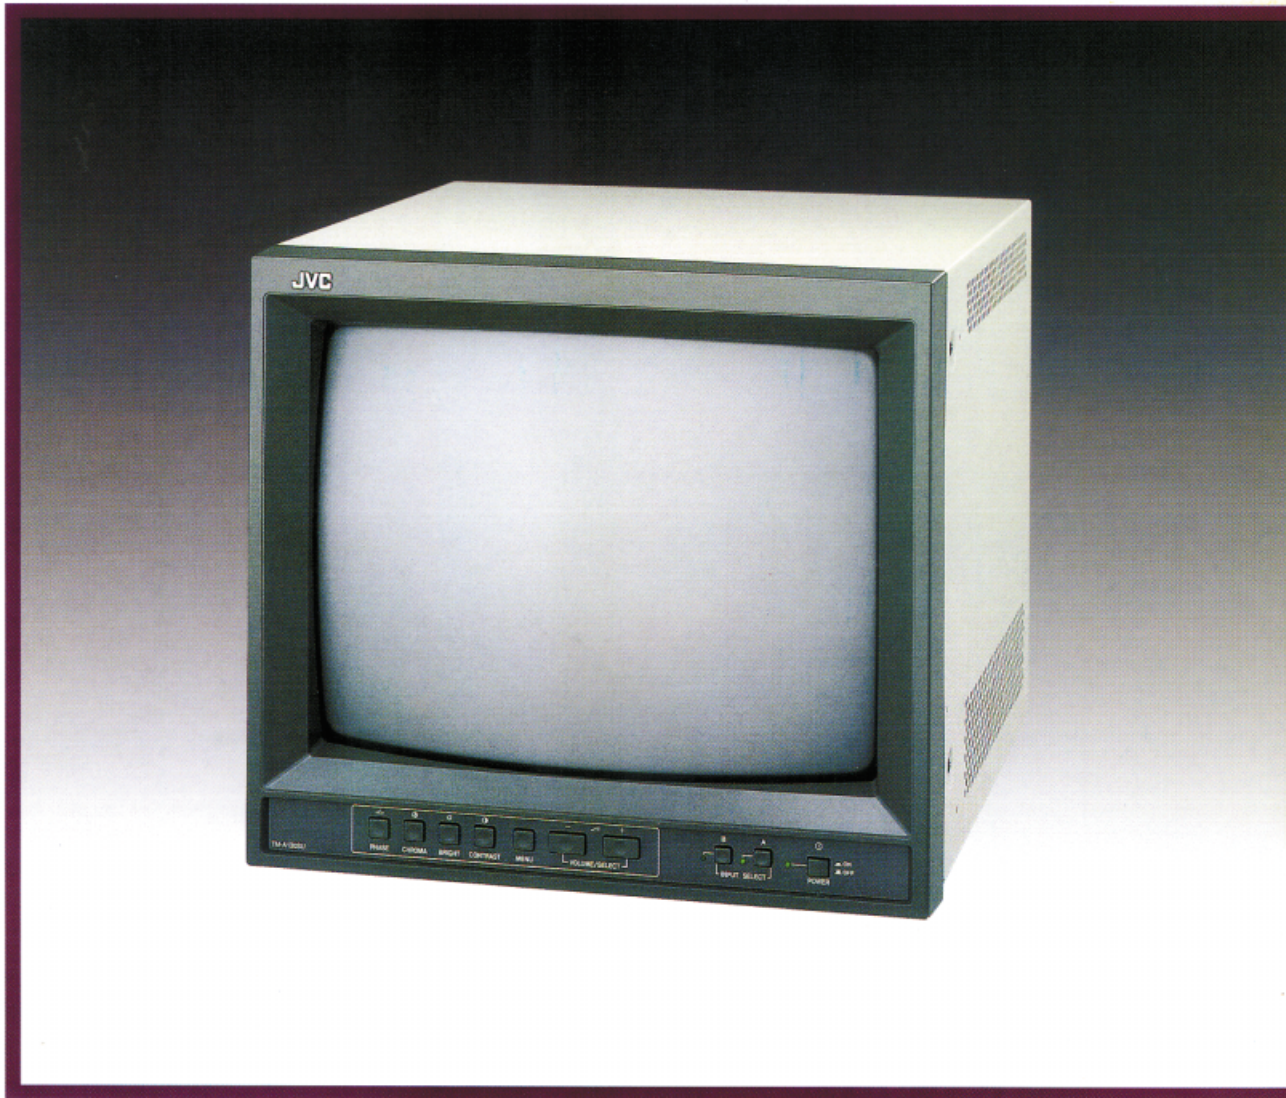

- Comb Filter
- Two Composite Video Inputs
- One Y/C Input

- Two Audio Inputs
- Multi-Format Compatible (NTSC/PAL)
- Built-in Speaker

# Full-Featured, Multi-Application Monitor

The new JVC TM-A130SU brings you the powerful monitoring functions you need, along with exceptional durability and versatility. It opens up a wide array of professional, CCTV, and education applications.

## ■ Comb Filter

A built-in comb filter produces sharper pictures and reduces cross color interference.

## ■ Multi-Format Compatibility

The TM-A130SU accepts both NTSC and PAL input signals. A built-in auto-detection function identifies the input signal and automatically selects the mode.

## ■ Built-in Speaker

Audio monitoring is available from the built-in, high-quality speaker with an output of 1 W.

## ■ Composite and Y/C Inputs


The versatile TM-A130SU accepts signals from both composite and Y/C sources.

## Specifications

Type	Color video monitor
Color system	NTSC/PAL, Auto select
CRT	13" (diagonally measured), in-line guns, stripe pitch of 0.64 mm
Scanning frequency	H: 15.625 kHz (PAL)/15.75 kHz (NTSC) V: 50/60 Hz
Horizontal resolution	More than 320 TV lines
Power requirement	120 V AC, 60 Hz
Power consumption	0.87 A
Color temperature	6,500°K
Inputs	
1. Input A: Composite video	1.0 V (p-p), 75 ohms, negative sync., auto-termination, BNC x 2, bridged-out possible
2. Input B*: Composite video	1.0 V (p-p), 75 ohms, negative sync., auto-termination, BNC x 2, bridged-out possible
Y/C	Y: 1.0 V (p-p), 75 ohms, negative sync. C: 0.3 V (p-p), 75 ohms (PAL) 0.286 V (p-p), 75 ohms (NTSC)
Audio connectors	RCA pin x 2 for input A and input B channels, bridged-out possible
Audio speaker	8 cm round, 1 W output
Power cord	Detachable type
Weight	27 lbs. (12.2 kg)
Option	7U rack mountable


\*The Y/C terminal is given priority.

## Rear Panel

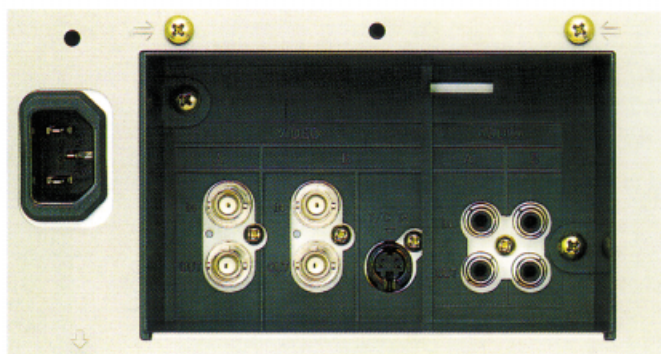

## Dimensions

Unit: inches (mm)

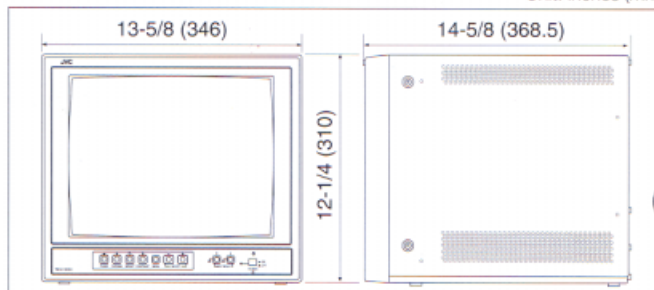

## Front Panel



Design and specifications subject to change without notice.

# JVC<sup>®</sup> DISTRIBUTED BY

JVC PROFESSIONAL PRODUCTS COMPANY  
DIVISION OF JVC AMERICAS CORP.  
1700 Valley Road, Wayne, N.J. 07470  
TEL: (973) 315-5000, (800) 582-5825  
FAX: (973) 315-5030  
E-mail: [proinfo@jvc.com](mailto:proinfo@jvc.com)

JVC CANADA INC.  
21 Finchdene Square, Scarborough, Ontario M1X 1A7  
TEL: (416) 293-1311 FAX: (416) 293-8208  
Internet Web Site <http://www.jvcpro.com/>

Printed in Japan  
ICZ-0216